

538, 317

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/054836 A1

(51) International Patent Classification⁷: **B60K 6/04**

(21) International Application Number:
PCT/EP2003/051022

(22) International Filing Date:
16 December 2003 (16.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO2002A001088
16 December 2002 (16.12.2002) IT

(71) Applicants (for all designated States except US): **UNIVERSITA' DI PISA** [IT/IT]; Lungarno Pacinotti, 43, I-56100 PISA (IT). **PIAGGIO & C. S.P.A.** [IT/IT]; Viale Rinaldo Piaggio, 25, I-56025 PONTEDERA (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VITALE, Emilio**


[IT/IT]; Via P. L' Aretino, 43, I-56010 ARENA METATO (IT). **FRENDI, Francesco** [IT/IT]; Via Po, 7, I-56122 PISA (IT). **ARNONE, Luigi** [IT/IT]; Via S. Mandato, 32, I-80136 NAPOLI (IT). **MARACCI, Maurizio** [IT/IT]; Via Bat-Yam, 27, I-57128 LIVORNO (IT). **RIGGIO, Giovanni** [IT/IT]; Contrada Pantani, 9, I-87027 PAOLA (IT).

(74) Agents: **JORIO, Paolo** et al.; STUDIO TORTA S.r.l., Via Viotti, 9, I-10121 TORINO (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: **HYBRID DRIVE ASSEMBLY FOR A VEHICLE, IN PARTICULAR A SCOOTER**

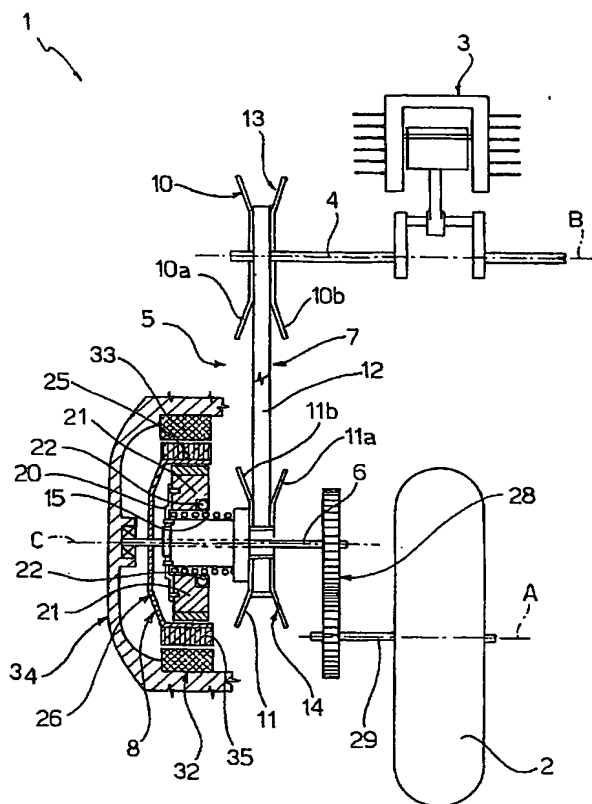

(57) Abstract: A hybrid drive assembly (1) for a vehicle having at least one drive wheel (2), the drive assembly including an internal combustion engine (3); a transmission unit (5) interposed between a drive shaft (4) of the internal combustion engine (3) and a propeller shaft (6) connected angularly to the drive wheel (2), and in turn including a continuously variable transmission (7) having a drive pulley (10) connected angularly to the drive shaft (4) and a driven pulley (11), and a centrifugal clutch (8) having a hub (20) connected to the driven pulley, and a driven bell (26) connected to the propeller shaft (6); and an electric machine (32) having a rotor (35) integral with the bell (26) of the centrifugal clutch (8). The drive assembly (1) is controlled by a control unit (38), in response to a number of input signals (Ss, Sa, Sf), in a number of operating modes including an all-combustion propulsion mode, an all-electric propulsion mode, a first hybrid propulsion mode wherein the internal combustion engine (3) and the electric machine (32) are connected in series, and a second hybrid propulsion mode wherein the internal combustion engine (3) and the electric machine (32) are connected in parallel.

WO 2004/054836 A1



(84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

5

HYBRID DRIVE ASSEMBLY FOR A VEHICLE, IN PARTICULAR A
SCOOTER

10 TECHNICAL FIELD

The present invention relates to a hybrid drive assembly for a road vehicle, in particular a scooter.

BACKGROUND ART

As is known, numerous road vehicle, in particular
15 car, manufacturers are currently experimenting hybrid-propulsion vehicles, some of which have recently been marketed. Though "hybrid propulsion" normally refers to the use of two or more different propulsion systems, the solutions hitherto proposed are normally a combination of
20 an internal combustion engine (hereinafter referred to simply as a "combustion engine") and an electric motor, to exploit the advantages and compensate the disadvantages of each.

More specifically, the main advantage of a
25 combustion engine, and the reason why it is used almost exclusively in road vehicles, is the fuel distance obtainable by virtue of the high energy concentration of the fuel employed (substantially hydrocarbons). On the

other hand, a combustion engine produces harmful emissions, can only operate within a given speed range, thus requiring the use of auxiliary components (gearbox and clutch), and has a relatively high noise level.

5 Moreover, even within the operating range, the efficiency of a combustion engine is fairly low (about 20-30%), and variations in the steady-state operation of the engine considerably increase pollutant emissions.

10 An electric motor produces no "local" pollution, is quiet, highly efficient (about 80%), and capable of generating torque as of start-up. Application in road vehicles, however, has so far been impaired by the limited range of the electric batteries currently available, at least those of a size, weight and cost
15 feasible for earth vehicles.

To eliminate or reduce the drawbacks associated with the use of one type of engine/motor, hybrid solutions of various configurations have been proposed enabling alternative or combined use of both propulsion systems.

20 More specifically, in a first known so-called "series hybrid" combination, the combustion engine serves solely to drive an electric current generator, which charges the batteries powering the electric motor : propulsion is therefore governed exclusively by the
25 electric motor. This solution provides for a considerable reduction in consumption, by the combustion engine only being called upon to supply average power, and so being operating in optimum steady conditions.

In the "parallel hybrid" configuration, both the combustion engine and the electric motor are connected to the drive wheels by appropriate transmission mechanisms.

Known hybrid drive assemblies of the type briefly
5 described above are complex, expensive, and bulky, which is why, to the Applicant's knowledge, they have never been marketed for compact, low-cost vehicles, such as scooters.

DISCLOSURE OF INVENTION

10 It is an object of the present invention to provide an extremely straightforward, low-cost, compact hybrid drive assembly, which can also be used in small, low-cost road vehicles, such as scooters, but which also permits selection of a number of operating modes on the basis of
15 different operating requirements or road conditions.

According to the present invention, there is provided a hybrid drive assembly for a vehicle having at least one drive wheel, the drive assembly comprising an internal combustion engine; and a transmission unit
20 interposed between a drive shaft of the internal combustion engine and a propeller shaft connected angularly to the drive wheel, and in turn comprising a clutch having a drive member connected to the drive shaft, and a driven member connected to the propeller
25 shaft; said drive assembly also comprising an electric machine which can be operated instead of or in combination with said internal combustion engine, and being characterized in that said electric machine

comprises a rotor connected angularly and permanently to said driven member of said clutch.

The present invention also relates to a vehicle, in particular a scooter, comprising such a hybrid drive assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

Two preferred, non-limiting embodiments of the present invention will be described by way of example with reference to the accompanying drawings, in which:

10 Figure 1 shows a diagram of a hybrid drive assembly in accordance with a first embodiment of the invention;

Figure 2 shows a diagram of a control system for controlling the Figure 1 drive assembly;

15 Figure 3 shows a partial diagram of an alternative embodiment of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

Number 1 in Figure 1 indicates as a whole a hybrid drive assembly for a scooter having a rear drive wheel 2 of axis A.

20 Drive assembly 1 comprises a combustion engine 3 having a drive shaft 4 of axis B parallel to axis A; and a transmission unit 5 interposed between drive shaft 4 and a propeller shaft 6 of axis C, parallel to axes A and B, and connected angularly to the drive wheel 2.

25 More specifically, transmission unit 5 comprises a continuously variable transmission or CVT 7 (hereinafter referred to simply as "CVT 7"), and a centrifugal clutch 8 in series with each other.

CVT 7 comprises a drive pulley 10 fitted to drive shaft 4; a driven pulley 11 coaxial with and fitted in angularly free manner to propeller shaft 6; and a V belt 12 looped about pulleys 10, 11. Pulleys 10, 11 have
5 respective V grooves 13, 14 for belt 12, and are defined by two half-pulleys 10a, 10b and 11a, 11b respectively, which are movable axially with respect to each other to vary the width of groove 13, 14 and therefore the winding diameter of belt 12.

10 Variation of the relative axial position of half-pulleys 10a, 10b of drive pulley 10 is controlled by a known centrifugal device not shown; and half-pulleys 11a, 11b of driven pulley 11 are loaded axially towards each other by a spring 15 to automatically adapt the winding
15 diameter of belt 12 inversely to that of drive pulley 10.

More specifically, driven pulley 11 is connectable selectively to propeller shaft 6 by centrifugal clutch 8, which comprises a hub 20 fitted for rotation to driven pulley 11; a number of centrifugal weights 21 carried by
20 hub 20 and maintained in a radially withdrawn rest position by springs 22; and a driven bell 26 integral with propeller shaft 6.

In response to rotation of hub 20 at an angular speed sufficient to overcome the reaction of springs 22,
25 centrifugal weights 21 move radially outwards to cooperate frictionally with a substantially cylindrical lateral wall 25 of bell 26.

Spring 15 of driven pulley 11 is compressed axially

between hub 20 of centrifugal clutch 8 and the movable half-pulley 11b, so as to load half-pulley 11b axially towards the fixed half-pulley 11a.

Propeller shaft 6 is connected to drive wheel 2 by a
5 conventional reduction gear 28 shown only schematically in Figure 1 and having propeller shaft 6 as the input member, and, as the output member, a shaft 29 of axis A, to which drive wheel 2 is fixed rigidly in use.

According to the present invention, drive assembly 1
10 also comprises an electric machine 32 coaxial with centrifugal clutch 8 and having a stator 33 housed in a fixed casing 34 of drive assembly 1, and a rotor 35 outwardly coaxial with lateral wall 25 of bell 26 of centrifugal clutch 8, and integral with bell 26 and
15 therefore with propeller shaft 6.

Electric machine 32 is conveniently a reversible type, and is connected to the vehicle battery 36 (Figure 2) for use as a generator to charge the battery in given operating conditions. Drive assembly 1 also comprises an
20 electric generator 37 driven by combustion engine 3 in known manner and connected to battery 36.

Drive assembly 1 is controlled by a control unit 38 which controls electric machine 32, and an actuator 39 for adjusting the position of a butterfly valve 40 of
25 combustion engine 3, in response to a number of input signals indicating the operating conditions of assembly 1, and which comprise a signal Sa indicating the position of an accelerator grip 44, and signals Sf indicating user

action on the brake levers 45.

Control unit 38 also receives input signals Ss from a selector device 46 located on the instrument panel of the vehicle and for selecting the operating mode of drive assembly 1. The selector device may comprise, for example, a number of buttons T, E, P, S for respectively selecting the following operating modes:

"combustion" (T), in which propulsion is provided solely by combustion engine 3;

10 "electric" (E), in which propulsion is provided solely by electric machine 32 operating as an electric motor;

"parallel hybrid" (P), in which combustion engine 3 and electric machine 32 both provide drive power; and

15 "series hybrid" (S), in which combustion engine 3 is used solely to power electric generator 37 to charge battery 36, while torque to the drive wheel is provided solely by electric machine 32.

Operation of drive assembly 1 will now be described with reference to the above operating modes.

20 In "combustion" mode, electric machine 32 is not powered, so that, disregarding the slight increase in the moment of inertia of bell 26 of centrifugal clutch 8, drive assembly 1 functions in exactly the same way as a conventional, all-mechanical assembly, as though electric machine 32 did not exist. More specifically, at idling speed of combustion engine 3, CVT 7 maintains a "short" ratio defined by the minimum winding diameter of belt 12

on drive pulley 10, and by the maximum winding diameter of belt 12 on driven pulley 11. In this condition, centrifugal clutch 8 is open, so that propeller shaft 6 is disconnected from CVT 7 and transmits no torque to
5 drive wheel 2.

As the rotation speed of drive shaft 4 increases, centrifugal clutch 8 is closed by the movement of centrifugal weights 21, which rotationally connect bell 26, and therefore propeller shaft 6, to driven pulley 11
10 of CVT 7, so that the vehicle is started with a "short" transmission ratio.

As the speed of drive shaft 4 increases further, CVT 7 switches, gradually and automatically in known manner not described in detail, from said "short" ratio to a
15 "long" ratio defined by the maximum winding diameter of belt 12 on drive pulley 10, and by the minimum winding diameter of belt 12 on driven pulley 11.

When decelerating or braking, the above operating steps are repeated in reverse. Moreover, rotor 35 of
20 electric machine 32, being integral with bell 26 of the centrifugal clutch, is driven by drive wheel 2, so that electric machine 32 acts as an electric current generator which draws mechanical power (and so acts as an electrodynamic brake) and generates electrical power.

25 In "electric" mode, combustion engine 3 is not operated, so that drive shaft 4 and CVT 7 are stationary, and centrifugal clutch 8 is open, by centrifugal weights 21 being subjected solely to the return force exerted by

springs 22. Everything upstream from bell 26, including combustion engine 3 and CVT 7, is therefore completely disconnected from drive wheel 2.

The drive torque of electric machine 32, whose rotor 5 35 is integral with bell 26, is transmitted by the bell directly to propeller shaft 6 and via reduction gear 28 to drive wheel 2.

In this operating mode too, when decelerating or braking, with no power being generated by electric 10 machine 32, rotor 35 is driven and electric machine 32 draws mechanical power and generates electrical power to charge battery 36.

In "parallel hybrid" mode, combustion engine 3 and electric machine 32, the latter operating as a motor as 15 described in "electric" mode, operate simultaneously; and the torque and power produced by both come together and are added at propeller shaft 6, thus greatly improving performance. Moreover, user power demand can be divided between combustion engine 3 and electric machine 32 to 20 reduce consumption and/or emissions.

In "series hybrid" mode, combustion engine 3 serves solely to drive electric generator 37, and propulsion is provided solely by electric machine 32. With the architecture of assembly 1 shown in Figure 1, for 25 combustion engine 3 to be disconnected from drive wheel 2, engine speed must be low enough not to close centrifugal clutch 8. In the event this imposes a less than optimum operating condition of combustion engine 3

in terms of efficiency and emissions, the architecture of assembly 1 is appropriately modified as shown in Figure 3, in which driven pulley 11 and hub 20 of the centrifugal clutch, as opposed to being connected permanently, are connectable selectively by a coupling 51, e.g. an electromagnetic so-called "Gravina coupling" controlled by unit 38.

With this transmission arrangement, when "series hybrid" mode is selected, coupling 51 is set to the "open" position, so that combustion engine 3 can operate at constant speed selected to optimize efficiency and minimize emissions, regardless of the intervention threshold speed of centrifugal clutch 8. Control unit 38 may conveniently be programmed to operate combustion engine 3 at two or more different power levels (but always at constant speed at each power level) depending on the mean power required by the user and/or road conditions.

Moreover, coupling 51 permits switching from one operating mode to another without stopping the vehicle.

When braking or decelerating in hybrid modes too, electric machine 32 acts as a generator, as opposed to a motor, and therefore as a regenerative brake.

The advantages of drive assembly 1 according to the present invention will be clear from the foregoing description.

In particular, the transmission architecture provides for obtaining an extremely straightforward, low-

cost, compact hybrid drive assembly that can also be used in small, low-cost road vehicles such as scooters, and which can operate in a number of modes selectable on the basis of different operating requirements and road conditions.

Moreover, the various operating modes permit energy saving, by virtue of electric machine 32 operating as a regenerative brake.

Finally, the transmission architecture provides for optimum global efficiency in each operating mode, by limiting undesired interaction between the two propulsion systems when operated individually, and by synergistically exploiting the potential of both in hybrid operating modes. In fact, in "combustion" mode, assembly 1 operates as though electric machine 32 did not exist; in "electric" mode, combustion engine 3 and CVT 7 are disconnected from drive wheel 2 and in no way impair efficiency; in "parallel hybrid" mode, the total power of both propulsion systems can be exploited, and power demand divided between the two propulsion systems to reduce consumption and/or emissions; and, in "series hybrid" mode, considerable energy saving is achieved by operating combustion engine 3 in optimum steady conditions in terms of efficiency.

Clearly, changes may be made to, and to control of, drive assembly 1 as described herein without, however, departing from the scope of the accompanying Claims.

In particular, CVT 7 may be replaced by a different

type of transmission, e.g. a synchronous belt transmission; centrifugal clutch 8 may be replaced by a controlled clutch; and electric machine 32 may be located differently, providing rotor 35 is permanently connected downstream from clutch 8, i.e. connected permanently to drive wheel 2.

One or more "automatic" control modes may be provided, in which the control unit, as opposed to activating the above control modes ("combustion", "electric", "parallel hybrid" and "series hybrid") as selected by the user, may switch automatically from one to another on the basis of programmed control logic, e.g. to optimize performance, minimize consumption or emissions, or in particular operating conditions. For example, an automatic switch may be made from "electric" to "combustion" or "series hybrid" mode, in the event the charge of battery 36 falls below a predetermined threshold value.

CLAIMS

1) A hybrid drive assembly (1) for a vehicle having at least one drive wheel (2), the drive assembly comprising an internal combustion engine (3); and a transmission unit (5) interposed between a drive shaft (4) of the internal combustion engine (3) and a propeller shaft (6) connected angularly to the drive wheel (2), and in turn comprising a clutch (8) having a drive member (20) connected to the drive shaft (4), and a driven member (26) connected to the propeller shaft (6); said drive assembly (1) also comprising an electric machine (32) which can be operated instead of or in combination with said internal combustion engine (3), and being characterized in that said electric machine (32) comprises a rotor (35) connected angularly and permanently to said driven member (26) of said clutch (8).

2) A drive assembly as claimed in Claim 1, characterized in that said transmission unit comprises a CVT (7) having a drive pulley (10) connected angularly to the drive shaft (4) of the internal combustion engine (3), and a driven pulley (11) connectable to the hub (20) of the clutch (8).

3) A drive assembly as claimed in Claim 1 or 2, characterized in that said clutch (8) is a centrifugal clutch; said driven member of said clutch (8) being a bell (26) integral with said propeller shaft (6).

4) A drive assembly as claimed in Claim 3, characterized in that said rotor (35) of said electric machine (32) is coaxial and integral with said bell (26) of said clutch (8).

5 5) A drive assembly as claimed in any one of the foregoing Claims, characterized in that said electric machine (32) is reversible.

6) A drive assembly as claimed in one of the foregoing Claims, characterized by comprising a coupling
10 (51) interposed between said drive shaft (4) and said drive member (20) of said clutch (8).

7) A drive assembly as claimed in Claim 6, characterized in that said coupling (51) is controlled electromagnetically.

15 8) A drive assembly as claimed in Claim 6 or 7, when dependent on one of Claims 2 to 5, characterized in that said coupling (51) is interposed between said driven pulley (11) and said drive member (20) of said clutch (8).

20 9) A drive assembly as claimed in any one of the foregoing Claims, characterized by comprising an electric generator (37) driven by said internal combustion engine (3).

25 10) A drive assembly as claimed in any one of the foregoing Claims, characterized by comprising a control unit (38) for controlling said internal combustion engine (3) and said electric machine (32), in response to a number of input signals (Sa, Sf, Ss), in a number of

operating modes comprising at least a combustion mode wherein only the internal combustion engine (3) is activated, an electric mode wherein said electric machine (32) operates as a motor and said internal combustion engine (3) is disabled, a parallel hybrid mode wherein said internal combustion engine (3) and said electric machine (32) are both activated and connected to said drive wheel (2), and a series hybrid mode wherein said internal combustion engine is disconnected from said drive wheel (2) and drives said electric generator (37).

11) A drive assembly as claimed in Claim 10, characterized by comprising selecting means (46) for selecting said operating modes of said drive assembly (1); said input signals (Sa, Sf, Ss) comprising at least a number of input signals (Ss) generated by said selecting means (46).

12) A drive assembly as claimed in Claim 10 or 11, characterized in that said input signals (Sa, Sf, Ss) comprise a signal (Sa) indicating the position of an accelerator member (44).

13) A drive assembly as claimed in one of Claims 10 to 12, characterized in that said input signals (Sa, Sf, Ss) comprise a signal indicating actions on a brake control member (45) of the vehicle.

14) A vehicle having at least one drive wheel (2), characterized by comprising a hybrid drive assembly (1) as claimed in any one of the foregoing Claims.

15) A vehicle as claimed in Claim 14,

characterized by being a scooter.



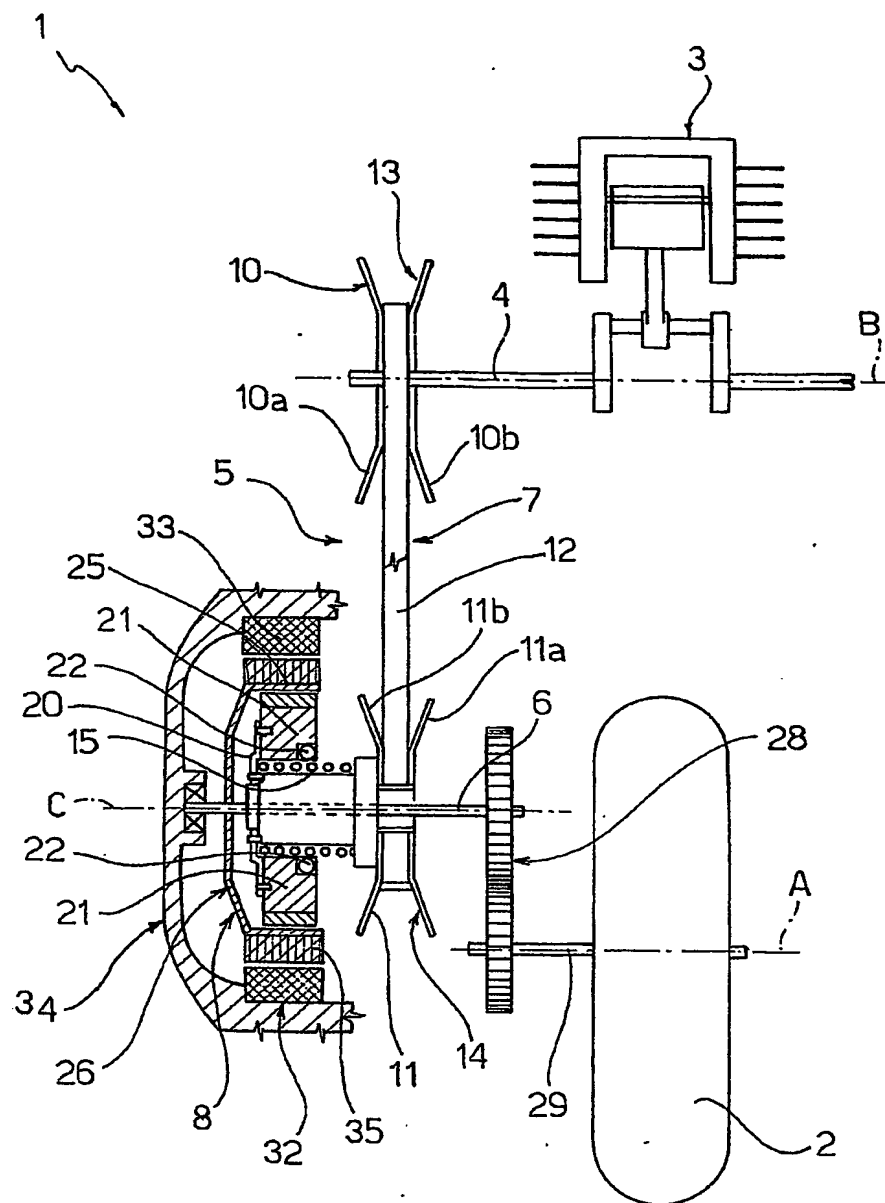


Fig. 1

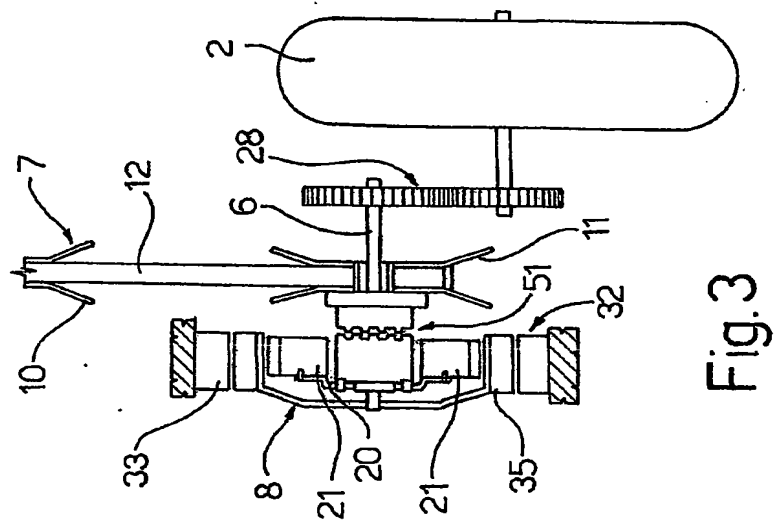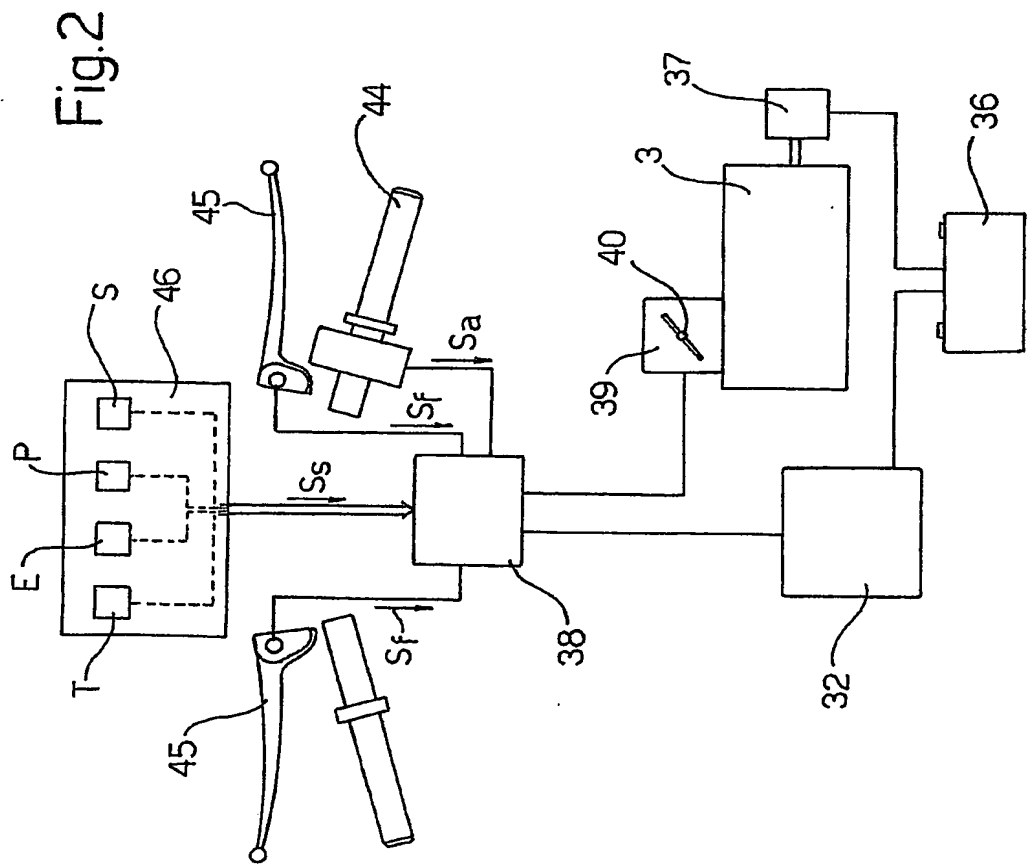

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/51022

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60K6/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60K B60M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 908 343 A (AISIN AW CO) 14 April 1999 (1999-04-14)	1,4-7,9, 12-15
Y	paragraphs '0011!', '0014!', '0039!; figure 1	3,10,11
X	DE 100 36 966 A (TOYOTA JLDOSHA KABUSHIKI KAISH) 5 April 2001 (2001-04-05)	1,2,5-7, 10-15
Y	column 4, line 5 -column 5, line 25; figures 1-3	3
X	US 2001/024994 A1 (SUGANO TAKU) 27 September 2001 (2001-09-27)	1,2,5
Y	paragraphs '0022!', '0041!; figure 1	3
Y	US 5 841 201 A (IBARAKI RYUJI ET AL) 24 November 1998 (1998-11-24)	10,11
	abstract; figure 1	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the International filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

7 May 2004

Date of mailing of the international search report

17/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Călămar, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/51022

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 445 873 A (PIAGGIO VEICOLI EUROP) 11 September 1991 (1991-09-11)	1,2
Y	claim 5; figure 1 ----	3
X	DE 100 06 743 A (STROBEL MARTIN) 12 October 2000 (2000-10-12) column 2, line 40 -column 2, line 65; figure 1 ----	1,2
X	US 6 155 366 A (LIN YU TSAI) 5 December 2000 (2000-12-05) column 2; figure 3 -----	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/51022

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0908343	A	14-04-1999	JP 11107798 A	20-04-1999
			EP 0908343 A2	14-04-1999
			US 6269895 B1	07-08-2001
DE 10036966	A	05-04-2001	JP 2001047881 A	20-02-2001
			DE 10036966 A1	05-04-2001
			US 6344008 B1	05-02-2002
US 2001024994	A1	27-09-2001	JP 2001260674 A	26-09-2001
US 5841201	A	24-11-1998	JP 9233607 A	05-09-1997
			JP 3097559 B2	10-10-2000
			JP 9317515 A	09-12-1997
EP 0445873	A	11-09-1991	IT 1239368 B	20-10-1993
			AT 93455 T	15-09-1993
			DE 69100291 D1	30-09-1993
			DE 69100291 T2	24-02-1994
			EP 0445873 A1	11-09-1991
			ES 2043424 T3	16-12-1993
			JP 4218430 A	10-08-1992
			US 5193634 A	16-03-1993
DE 10006743	A	12-10-2000	DE 10006743 A1	12-10-2000
US 6155366	A	05-12-2000	NONE	